

Pro LED LED Beacon



FEATURES

- Single- and dual-color versions
- Short and tall versions
- (25) selectable flash patterns
- Low-power functionality
- Branch guard, option
- Multi-voltage, 12/24 Vdc
- Built-in permanent/1-inch pipe mount metal base
- Five-year warranty

APPROVALS

- SAE J845 Class 1 (Amber, Blue, Red, White)
- CCR Title 13
- NFPA 1901 compliant
- IP69K





Versatile Warning Beacon Built for a Variety of Applications

For those seeking a work truck beacon with versatile capabilities, turn to the Pro LED Beacon light. Available in both tall and short models, this beacon warning light comes in a variety of different colors including several dual-color models. Whether you are looking for an Amber beacon, Blue, Green, Red, White, or some combination of these colors, the Pro LED Beacon is an ideal choice. With (25) unique flash patterns, the Pro LED Beacon has the capabilities needed to serve as an effective warning light in countless industries and vehicle applications.

Federal Signal's Pro LED Beacon is exceptionally versatile thanks to the numerous industry-leading technologies incorporated into its design. It utilizes Solaris® LED reflector technology to provide 360 degrees of brilliant warning light and comes equipped with low power functionality. Thanks to FSLink™ syncing technology, it can even be paired with the other FSLink warning lights on your vehicle to present a synchronized warning light pattern.

The Pro LED Beacon is an excellent beacon for regulatory compliance and carries the following approvals:

- SAE J845 Class 1 (Amber, Blue, Red, White)
- CCR Title 13 (Amber, Blue, Red)

This beacon has the ability to serve as a valuable tool for safety and compliance in numerous industries including the towing industry, construction, utility/maintenance, snow removal, landscaping, and many others.

The Pro LED Beacon was designed to serve as a work truck beacon and was designed to stand up to the adverse conditions sometimes faced on the road or job site. The beacon is securely mounted with a 1-inch pipe mount and is IP69K rated against dust and water. This LED beacon can also be equipped with an optional branch guard for those seeking additional protection.



Shown with branch guard (sold separately)



Built-in permanent/1-inch pipe mount metal base



HOW TO ORDER	2	LED Color	Dome Color
	`	ABGRW	A B C G R
PERMANENT/1-INC	Н РІРЕ МО	UNT, SINGLE-COLO	R, TALL DOME
300TMP-A-SB	Amber LE	Ds, Amber dome	
300TMP-B-SB	Blue LEDs	s, Blue dome	
300TMP-G-SB	Green LE)s, Green dome	
300TMP-R-SB	Red LEDs	Red dome	
300TMPC-A-SB	Amber LE	Ds, Clear dome	
300TMPC-B-SB	Blue LEDs	s, Clear dome	
300TMPC-G-SB	Green LE)s, Clear dome	
300TMPC-R-SB	Red LEDs	Clear dome	
PERMANENT/1-INCI	H PIPE MO	UNT, DUAL-COLOR,	TALL DOME
320TMP-AB-SB	Amber/Bl	ue LEDs, Clear dome	

320TMP-AB-SB	Amber/Blue LEDs, Clear dome
320TMP-AG-SB	Amber/Green LEDs, Clear dome
320TMP-AW-SB	Amber/White LEDs, Clear dome

PERMANENT/1-INCH PIPE MOUNT, SINGLE-COLOR, SHORT DOME

300SMP-A-SB	Amber LEDs, Amber dome
300SMP-B-SB	Blue LEDs, Blue dome
300SMP-R-SB	Red LEDs, Red dome
300SMPC-A-SB	Amber LEDs, Clear dome
300SMPC-B-SB	Blue LEDs, Clear dome
300SMPC-G-SB	Green LEDs, Clear dome
300SMPC-R-SB	Red LEDs, Clear dome

PERMANENT/1-INCH PIPE MOUNT, DUAL-COLOR, SHORT DOME


320SMP-AB-SB	Amber/Blue LEDs, Clear dome
320SMP-AG-SB	Amber/Green LEDs, Clear dome
320SMP-AW-SB	Amber/White LEDs, Clear dome

ACCESSORIES


300B-TALL 300B-SHORT Branch guard, tall Branch guard, short

SPECIFICATIONS

	TALL DOME	SHORT DOME		
OPERATING VOLTAGE	12/24 Vdc 2 A (Average) 4 A (Max) 25 -22° to +149° F (-30° to +65° C)			
CURRENT DRAW				
FLASH PATTERNS				
OPERATING TEMP				
PHYSICAL SPECIFICATIONS				
DIAMETER	7.3 in (18.4 cm)	7.3 in (18.4 cm)		
		7.3 in (18.4 cm) 3.6 in (9.2 cm)		
DIAMETER	7.3 in (18.4 cm)			

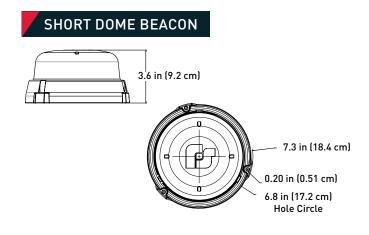

TALL DOME BEACON

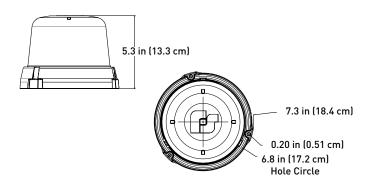



Solaris and FSLink are trademarks of Federal Signal Corporation.