



FEDERAL SIGNAL
Safety and Security Systems

Model IPX-LPV2
Adjustable Mounting Kit for
IMPAXX® and MicroPulse®

Installation Instructions

25500375

Rev. A2 0120

Printed in U.S.A.

© 2018-2020 Federal Signal Corporation

Limited Warranty

This product is subject to and covered by a limited warranty, a copy of which can be found at www.fedsig.com/SSG-Warranty. A copy of this limited warranty can also be obtained by written request to Federal Signal Corporation, 2645 Federal Signal Drive, University Park, IL 60484, email to info@fedsig.com or call +1 708-534-3400.

This limited warranty is in lieu of all other warranties, express or implied, contractual or statutory, including, but not limited to the warranty of merchantability, warranty of fitness for a particular purpose and any warranty against failure of its essential purpose.



FEDERAL SIGNAL
Safety and Security Systems

2645 Federal Signal Drive
University Park, Illinois 60484

www.fedsig.com

Customer Support

Police/Fire-EMS: 800-264-3578 • +1 708 534-3400

Work Truck: 800-824-0254 • +1 708 534-3400

Technical Support 800-433-9132 • +1 708 534-3400

© 2018-2020 Federal Signal Corporation

All trademarks are property of their respective owners.

Safety Message to Installers of Warning Light Equipment

⚠ WARNING

People's lives depend on your proper installation and servicing of Federal Signal products. It is important to read and follow all instructions shipped with this product and the original product. Listed below are some other important safety instructions and precautions you should follow:

- To properly install the lighting system, you must have a good understanding of automotive systems, along with proficiency in the installation and use of safety warning equipment.
- Do not install equipment or route wiring in the deployment path of an airbag.
- If a vehicle seat is temporarily removed, verify with the vehicle manufacturer if the seat needs to be recalibrated for proper airbag deployment.
- Frequently inspect the light system to ensure that it is operating properly and that it is securely attached to the vehicle.
- When drilling into a vehicle structure, ensure that both sides of the surface are clear of anything that could be damaged.
- Refer to the instructions packed with related products for additional precautions and information.
- File these instructions in a safe place and refer to them when maintaining and/or reinstalling the product.
- Do not stare directly into the lights at a close range, or permanent damage to your eyesight may occur.

Failure to follow all safety precautions and instructions may result in property damage, serious injury, or death.

Installation Instructions

Unpacking the Kit

After unpacking the product, inspect it for damage that may have occurred in transit. If it has been damaged or is missing a part, do not attempt to install or operate it. File a claim immediately with the carrier, stating the extent of the damage. Carefully check all envelopes, shipping labels and tags before removing or destroying them. Ensure that all parts in Table 1 have been included. If you are missing any parts, contact Customer Support at 1-800-264-3578, 7 a.m. to 5 p.m., Monday through Friday (CT).

Introduction

This publication has instructions for using the IPX-LPV2 Adjustable License Plate Mounting Kit to mount the IMPAXX® 300, 600, Viper EXT, MicroPulse® 3, MicroPulse 6, and MicroPulse 12 light heads to the license plate area of many vehicles. The assembled unit is 6 inches high by 17-1/4 inches wide.

NOTE: For electrical installation instructions, refer to the Installation and Maintenance Instructions packed with the light head.

Table 1 Kit Contents

Qty.	Description	Part Number
4	Screw, Machine, 1/4 in-20 Hex Head SS	7000A311-08
4	Screw, Machine, 6-32, Pan-Head, Phillips, SS	7000491-08
6	Screw, 8-32 Pan Head, 6 Lobe, Type TAPTITE®	7011163-04
4	Screw, #10, Type B, Flat-Head, 6-Lobe, Black, SS	7011248-08
4	Nut, 6-32 Keps®, SS	7058A046
4	Washer, 1/4 in, Flat, SS	7072A024
4	Washer, 1/4 in, Split Lock, SS	7074A016
1	Bracket Assembly, License Plate, IPX-V2	861301703
2	Bracket, IPX-MPS, Mounting, IPX-LP-V2	861301704
1	Bracket, Hat, License Plate, IPX-LP-V2	861301893

Installing the Kit

⚠ WARNING

AIRBAG DEPLOYMENT: Do not install or route wiring in the deployment path of an airbag. Failure to observe this warning will reduce the effectiveness of the airbag or potentially dislodge the equipment, causing serious injury or death.

NOTICE

DRILLING PRECAUTIONS: Before drilling holes, check the area you are drilling into to be sure that you do not damage vehicle components. All drilled holes should be de-burred, and all sharp edges should be smoothed. All wire routings going through drilled holes should be protected by a grommet or convolute/split loom tubing.

NOTICE

THREAD DAMAGE AND GALLING: To prevent thread damage and galling, use anti-seize lubricant on all stainless steel fasteners.

IMPORTANT: Plan all cable routing before the installation.


To mount the bracket:

1. Remove the license plate mounting hardware, license plate, and bracket from the vehicle.
2. Mount the hat bracket to the vehicle with the factory license plate hardware removed in Step 1. For the most secure mounting, install hardware at all four positions.
3. Loosely assemble the IPX-MPS mounting brackets to the license plate bracket with the six 8-32 pan-head screws.
4. Hold the assembly to the hat bracket and adjust the IPX-MPS brackets to the desired angle, then tighten the screws. Do not over-tighten.
5. Attach the light heads to the brackets.
 - For the IPX600 and Viper EXT, use the hardware supplied with the light head.

Installation Instructions

- For all other warning light models, use the 6-32 screws and Keps® nuts included with the kit.
6. Secure the assembly to the hat bracket with the four #10 flat-head screws.

Figure 1 Exploded view of the IPX-LV2 kit installation

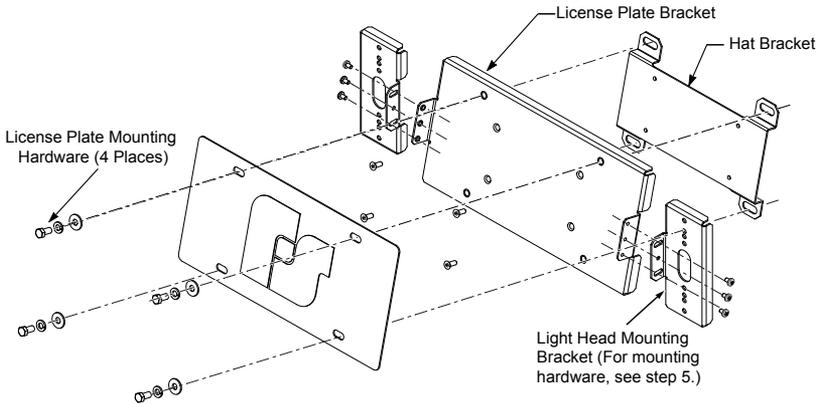

7. Mount the license plate with the supplied 1/4 inch screws, washers, and lock washers.

⚠ WARNING

LIGHT HAZARD: *To be an effective warning device, an emergency warning system produces bright light that can be hazardous to you eyesight when viewed at close range. Do not stare directly into the lights at a close range or permanent damage to your eyesight may occur.*

8. Test the lights for proper operation.

Getting Technical Support and Service

For technical support and service, please contact:

Service Department
Federal Signal Corporation
Phone: 1-800-433-9132
Email: empserviceinfo@fedsig.com

Getting Repair Service

The Federal Signal factory provides technical assistance with any problems that cannot be handled locally.

Any units returned to Federal Signal for service, inspection, or repair must be accompanied by a Return Material Authorization (RMA). Obtain a RMA from a local Distributor or Manufacturer's Representative.

Provide a brief explanation of the service requested, or the nature of the malfunction.

Address all communications and shipments to the following:

Federal Signal Corporation
Service Department
2645 Federal Signal Drive
University Park, IL 60484-3167

Ordering Replacement Parts

To order replacement parts, call Customer Support at 1-800-264-3578, 7 a.m. to 5 p.m., Monday through Friday (CT) or contact your nearest distributor.



FEDERAL SIGNAL
Safety and Security Systems

2645 Federal Signal Drive
University Park, Illinois 60484

www.fedsig.com

Customer Support

Police/Fire-EMS: 800-264-3578 • +1 708 534-3400

Work Truck: 800-824-0254 • +1 708 534-3400

Technical Support 800-433-9132 • +1 708 534-3400