

25500743 A0 0721


⚠ WARNING

To properly install this light, you must have a good understanding of automotive electrical procedures and systems, along with proficiency in the installation and use of safety warning equipment.

Installing the Light

- Black: To Chassis Ground
- Red: +Vdc for Activation

Figure 1 Exploded view

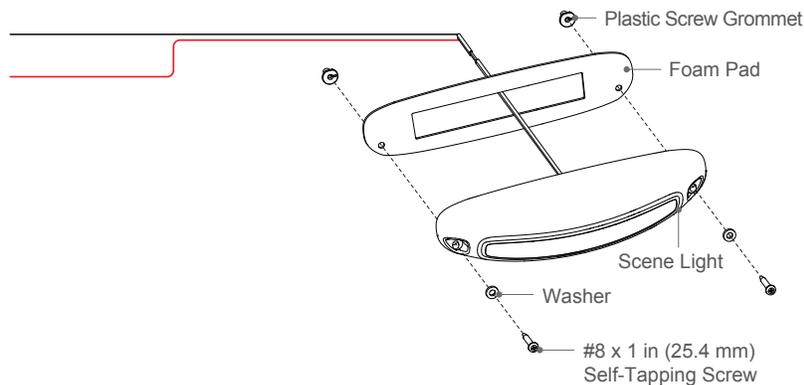

⚠ WARNING

SEAT REMOVAL PRECAUTION: If a vehicle seat is temporarily removed, verify with the vehicle manufacturer if the seat needs to be recalibrated for proper airbag deployment.


⚠ WARNING

LIGHT HAZARD: To be an effective warning device, this product produces bright light that can be hazardous to your eyesight when viewed at a close range. Do not stare directly into this lighting product at a close range, or permanent damage to your eyesight may occur.

To install the light:

1. Place the foam pad onto the desired mounting surface and mark the location for the two mounting screws and the wire routing hole located between the two screw holes. See Figure 2 for mounting dimensions.

Figure 2 Mounting Dimensions (Not to scale)

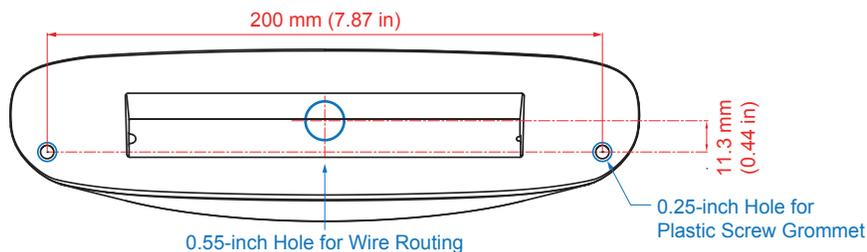

NOTICE

DRILLING PRECAUTIONS: When drilling holes, check the area you are drilling into to ensure that you do not damage vehicle components while drilling. All drilled holes should be deburred, and all sharp edges should be smoothed. All wire routings going through drilled holes should be protected by a grommet or convolute/split loom tubing.

Installing the COM9 Scene Light

2. Drill two 0.25-inch pilot holes for plastic screw grommets and one 0.55-inch for wire routing. Then refer to the exploded-view drawing shown to install two washers and two #8 by 1-inch (25.4 mm) self-tapping screws properly.
3. Feed the wires through the foam pad and wire routing hole and mount the scene light with the supplied self-tapping screws.
4. Apply silicone around the mounting holes and wire routing hole for sealing if necessary.



FEDERAL SIGNAL Safety and Security Systems

2645 Federal Signal Drive
University Park, Illinois 60484-3167

www.fedsig.com

Customer Support

Police/Fire-EMS: 800-264-3578 • +1 708 534-3400

Work Truck: 800-824-0254 • +1 708 534-3400

Technical Support: 800-433-9132 • +1 708 534-3400

© Copyright 2021 Federal Signal Corporation